

T5 High Bays

T5 H.O. Fluorescent 4- and 6-Lamp



GENERAL DESCRIPTION

- All-new, high efficiency T5 High Output fixture housing for cost-effective lighting of medium- and high-bay warehouses, manufacturing plants, sports facilities and retail spaces.
- Design features precision-formed beveled MIRO reflector to achieve maximum light output. White aluminum reflector also available. (Suffix WH).
- Nominally delivers either 19,000 lumens from four economical 54-watt H.O. lamps, or 31,000 lumens from six lamps; replaces H.I.D. fixtures on a one-for-one basis.
- Surface, pendant, chain or stem mounting.
- Optional wireguard with innovative fastener design allows easy lamp access.
- Highest quality materials and workmanship.

SPECIFICATIONS

Housing: Die-formed heavy-gauge cold rolled steel.

Finish: Post painted white housing with either MIRO or white aluminum reflector.


Ballast Access: Ballasts are accessible by removal of socket-plate screws. Reflector swings out on hinged ends.

Ballasts: Designed for use with Class P electronic ballasts for T5 H.O. lamps.


Lampholders: Accepts G5 push-through sockets and F54/T5HO lamps.

Mounting: Designed for surface, pendant, stem or chain hanging.

Wireguard (optional): Combination 6 and 9 ga. wire (A.W.G. Standard) with white powder-coat finish. Attaches with clips for easy lamp access.

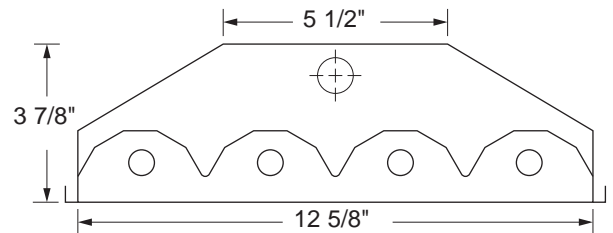

4-Lamp High Bay End View

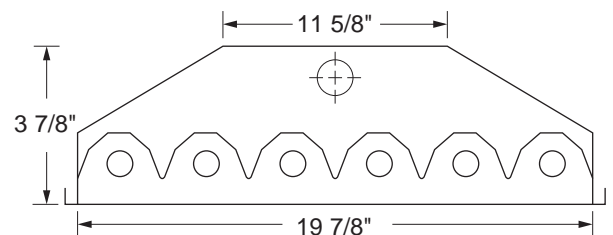

6-Lamp High Bay End View

Catalog No.	Lamps	Length
HBT5-446	(4) F54/T5HO	48"
HBT5-446-WH	(4) F54/T5HO	48"
HBT5-646	(6) F54/T5HO	48"
HBT5-646-WH	(6) F54/T5HO	48"

NOTES

Dimensions subject to change without notice.

This product is an OEM Component Kit requiring final assembly by a qualified OEM fixture manufacturer.